


NOTE FLOOR REQUIREMENTS
 FOR PROPER ANCHOR EMBANKMENT
 FLOOR MUST BE A MINIMUM OF
 4,000 PSI REINFORCED CONCRETE
 AT 6.00 IN. THICK

NOTE

- ELECTRICAL CONNECTIONS
 BETWEEN COLUMNS REQUIRED
- TOOLING PROVIDED BY CUSTOMER

PROPOSAL DRAWING

SPECIFICATIONS CHART	
LIFT DESCRIPTION - MHL2P ADJUSTABLE POSITIONER W/14" ROTATOR	
LIFT CAPACITY (LBS.)	15,000 LBS.
VERTICAL TRAVEL	68.50" (ADJUSTABLE)
MAX. ROTATIONAL TORQUE IN-LBS.	74,000 IN-LBS.
ELECTRICAL REQUIREMENTS	208/230V/460V 3-PH

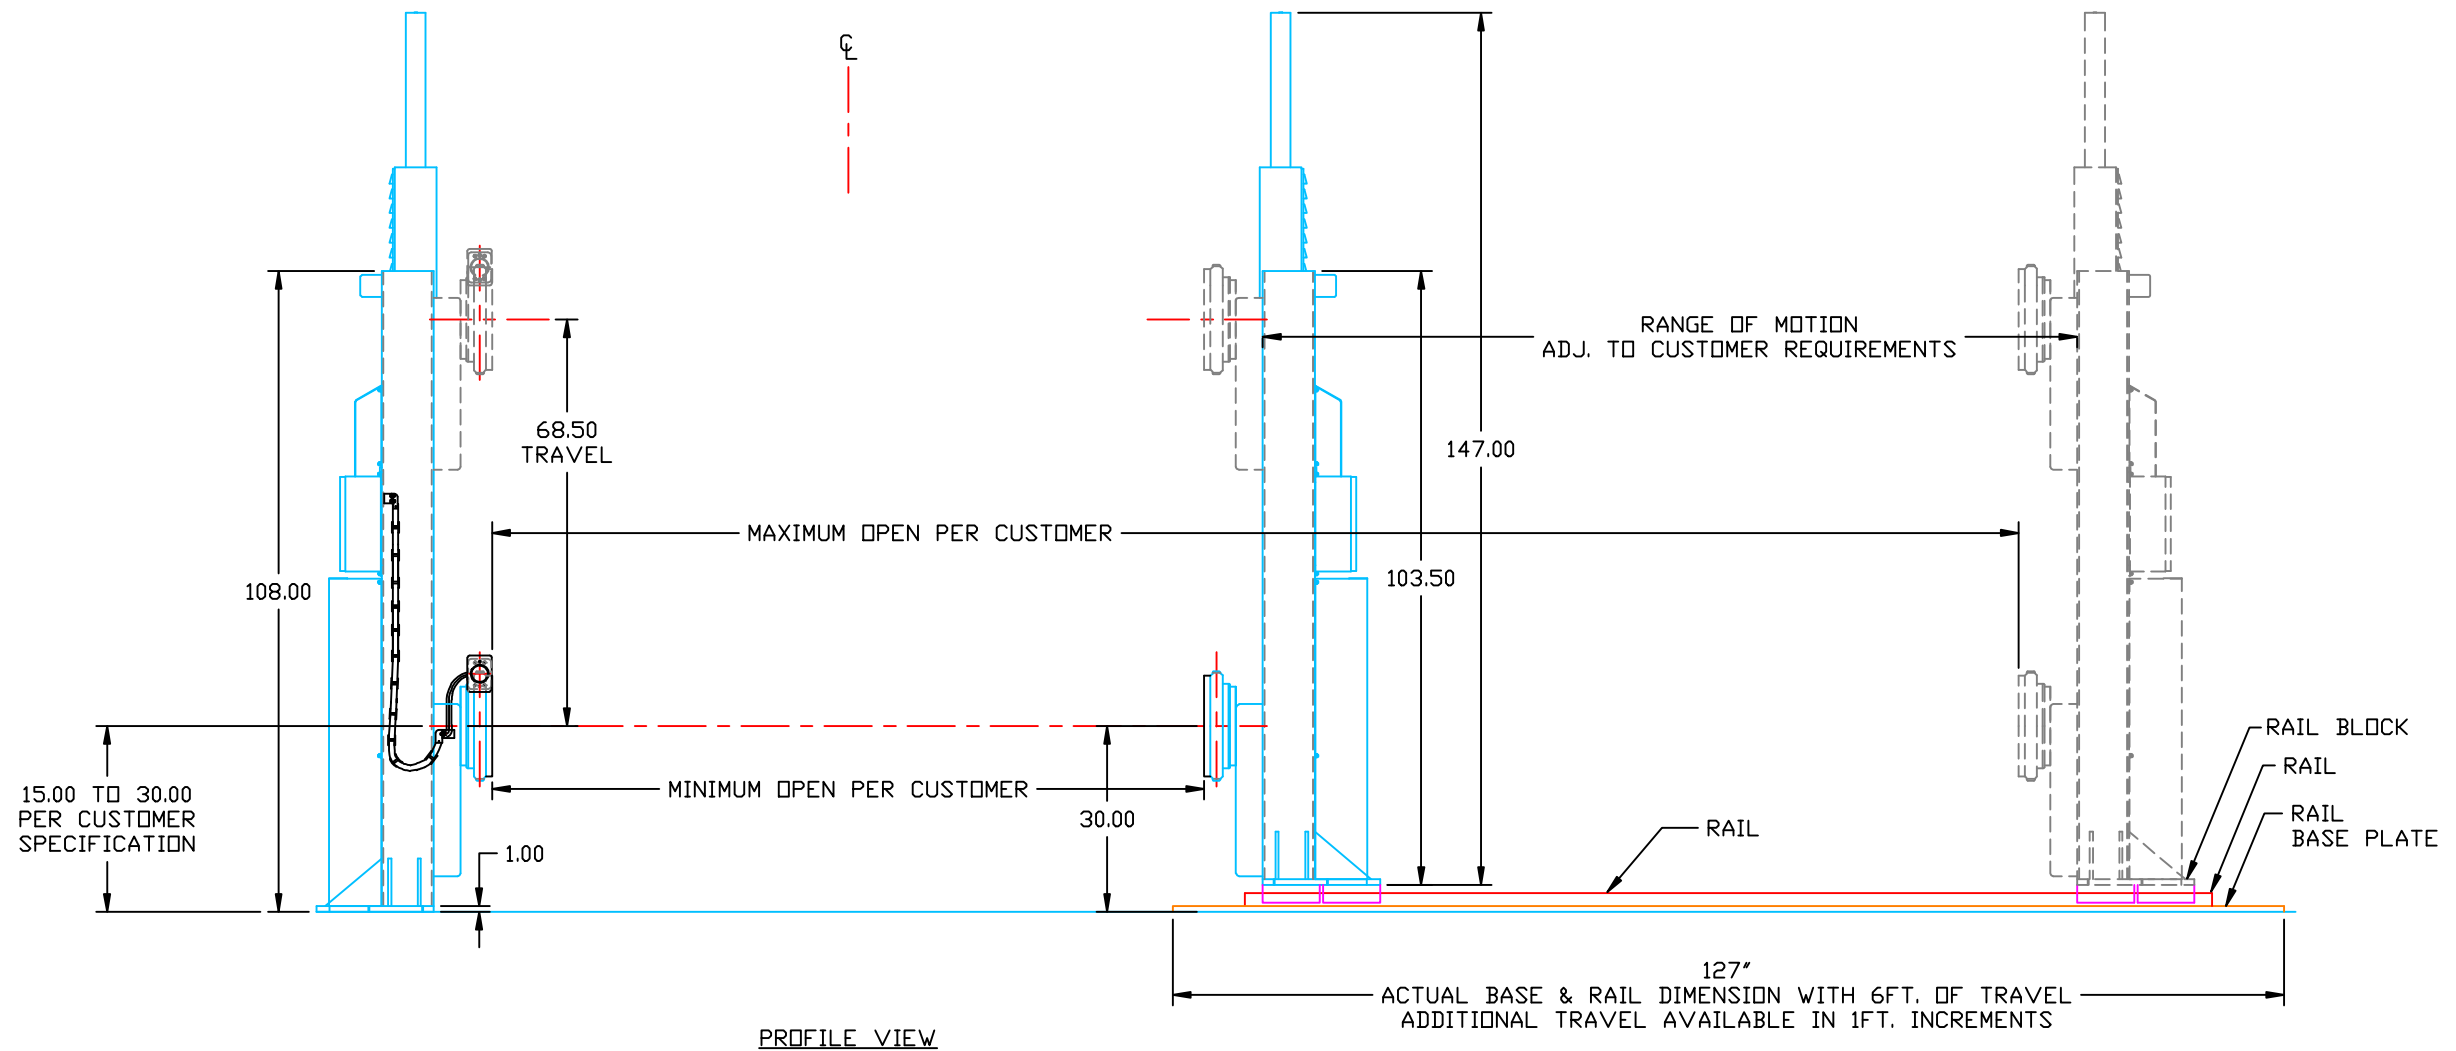

PROFILE VIEW

REV	E. C. R.	DATE	REV BY	CKD	UNLESS OTHERWISE SPECIFIED:	DRAWN BY:	DATE DRAWN:	THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPERTY OF A. L. M. CORP. AND IS PROVIDED ON A RESTRICTED BASIS. IT IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF A. L. M. CORP. AND MAY NOT BE COPIED, TRANSMITTED TO OTHERS, OR USED FOR MANUFACTURING PURPOSES WITHOUT THE WRITTEN PERMISSION OF A. L. M. CORP.
					DECIMALS XX ± 0.06 XXX ± 0.010	MCS	10/21/11	
					CONCENTRICITY T.I.R. .005	CHECKED BY:	DATE CHECKED:	
					ANGLES ± 1°	DG	10/21/11	
					MACH SURFACE 125	MYLAR REV. #	MYLAR DATE	
					DIMENSIONS IN () ARE REFERENCE DIMS., NO TOLERANCES ARE IMPLIED.			
						MYLAR #	SCALE:	
							1 : 24	
						ANSI Y14.5M	STANDARDS APPLY	
								GENERIC
								CORPORATION <small>200 Benchmark Industrial Dr. Streator, Illinois 61364</small>
								TITLE MHL2P ADJUSTABLE POSITIONER 15000 LBS CAPACITY
								DRAWING NO. 090212-02
								SHEET 1 OF 1